

Steelex Central Asia Ltd.

Part of the Steelex International Network

RotabroachTM

For cost effective hole production *Steelex Central Asia* offers the *Rotabroach* range of magnetic drilling machines. Produced in the UK since 1976 with quality and reliability that are second to none. The range comprises of the following machines;

Puma

- ◆ Drill holes on site or in the workshop
- ◆ Cuts holes up to 30mm diameter x 25mm deep
- ◆ 800 watts motor
- ◆ Feed capstan may be reversed for easy positioning in tight areas
- ◆ Controls mounted at the rear for better access
- ◆ 750 kgs magnetic adhesion
- ◆ Complete with 1/2" drill chuck

Model Number	:	CM/300/1A/CM/300/3A
Motor Specification	:	110v full load 7.8 amps 800w 230v full load 3.6 amps 800w
Overall Dimensions	:	(H) 420mm x (W) 170mm x (L) 250mm
Net Weight	:	12.2 kgs
Spindle Bore	:	19.05mm (3/4")
Safety Features	:	Electronic Overload



Panther

- ◆ Lightweight— ideal for use on site or in the workshop
- ◆ Cuts holes up to 40mm diameter x 50mm deep
- ◆ 1100 watts motor—faster easier holes
- ◆ Feed capstan may be reversed for easy positioning in tight areas
- ◆ Variable Speed—the right speed for the right diameter
- ◆ 750 kgs magnetic adhesion
- ◆ Automatic coolant bottle—puts the lubricant at the right spot

Model Number	:	CM/120/1A/CM/120/3A
Motor Specification	:	110v full load 11 amps 1100w 230v full load 5 amps 1100w
Overall Dimensions	:	(H) 480mm x (W) 180mm x (L) 250mm
Net Weight	:	12.8 kgs
Spindle Bore	:	19.05mm (3/4")
Safety Features	:	Clutch and electronic overload



Steelex Central Asia Ltd.

Supplying new and used industrial equipment and consultancy services to industry.

Phone : +442081233824

Fax : +442071171993

E-mail: sales@steelexcentralasia.com

Web : www.steelexcentralasia.com



Serving Manufacturing

Steelex Central Asia Ltd.

Part of the Steelex International Network

Cobra

- ◆ Drill hole on site or in the workshop
- ◆ Cuts holes up to 65mm diameter x 50mm deep
- ◆ 1400 watts heavy duty motor
- ◆ Feed capstan may be reversed for easy positioning in tight areas
- ◆ Controls mounted at the rear for better access
- ◆ 1200 kgs magnetic adhesion
- ◆ Variable Speed—the right speed for the right diameter

Model Number	:	CM/200/1AX/CM/200/3AX
Motor Specification	:	110v full load 14 amps 1400w 230v full load 6.0 amps 1400w
Overall Dimensions	:	(H) 565mm x (W) 170mm x (L) 250mm
Net Weight	:	17.8 kgs
Spindle Bore	:	19.05mm (3/4")
Safety Features	:	Clutch and electronic overload



Air Driven Machines



Also available are two units driven by compressed air. These units can be used in hazardous environments with a class 1 designation.

Models : CM 330 C
RD 130 C

Rail Drilling Machines

Patented multi-form template systems ensure accurate hole height and centers without measuring. Driven by a four stroke Honda engine.

Models : Rhino 2
Rhino 4



Rotabroach Cutters



A complete range of cutters is offered to suit all applications, these are as follows;

M42 high speed cutters.

For general engineering, construction & fabrication were the material is <850 N/mm² material hardness. Offered with either a 25mm depth of cut or a 50mm depth of cut.

Carbide tipped cutters.

For general engineering, construction & fabrication were the material is >850 N/mm² hardness. Offered in 25mm depth of cut only.

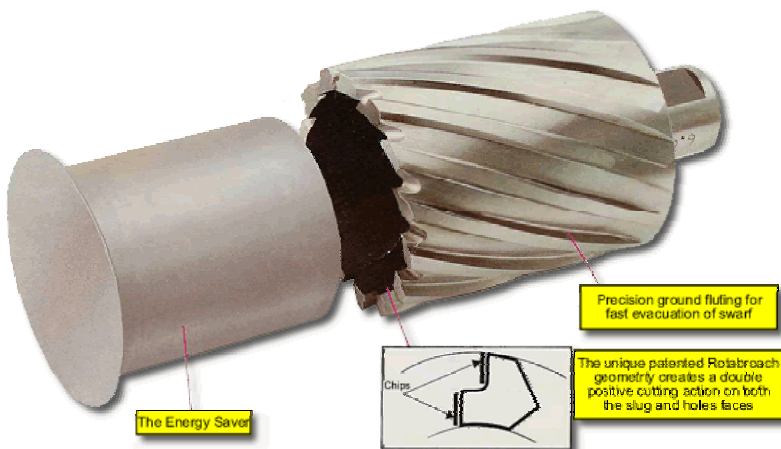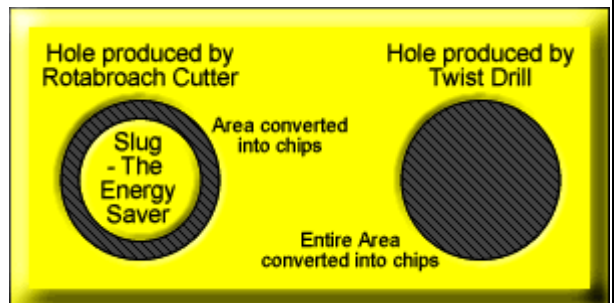

The design of the Rotabroach cutter "trepan" the hole rather than drilling out all the material.

Therefore nothing could be more efficient in terms of energy requirements. Consequently, Rotabroach requires low power and thrust to achieve very fast penetration rates, and the 'saved' power can be used to cut larger diameter sizes.

A simple "pilot pin" is used to position the machine in the correct place over the center mark. Many other types of cutter are available, please contact us for the complete list.



Serving Manufacturing

Phone : +442081233824
Fax : +442071171993
E-mail : sales@steelexcentralasia.com
Web : www.steelexcentralasia.com